

Analysis of Free Hydrogen Sulfide in Wines Using Gas Detection Tubes

Rachel B. Allison,¹
Austin Montgomery,¹
and Gavin L. Sacks^{1*}

Cite this article:
Allison RB, Montgomery A and
Sacks GL. 2021. Analysis of free
hydrogen sulfide in wines using
gas detection tubes.
Catalyst 6:1-8.

¹Department of Food Science,
Cornell University, 411 Tower
Road, Ithaca, NY 14853.

*Corresponding author
(gls9@cornell.edu)

Supplemental data is freely
available with this article.

Manuscript submitted April 2021,
revised July 2021, accepted July
2021

This is an open access article
distributed under the CC BY
license (<https://creativecommons.org/licenses/by/4.0/>).

By downloading and/or receiving
this article, you agree to the
Disclaimer of Warranties and
Liability. The full statement of
the Disclaimers is available at
[https://www.asevcatalyst.org/
content/proprietary-rights-notice-
catalyst](https://www.asevcatalyst.org/content/proprietary-rights-notice-catalyst). If you do not agree to the
Disclaimers, do not download and/
or accept this article.

doi: 10.5344/catalyst.2021.21003

Summary

Goals: Hydrogen sulfide (H₂S, “rotten egg” aroma) concerns winemakers due to its contribution to sulfur-like off-aromas, and convenient methods are needed for quantitation of H₂S in wines at or below its reported odor threshold. The use of selective, colorimetric gas detection tubes (GDTs) for measurement of H₂S during fermentation has been previously described, but this approach has not been adapted and validated for finished wines. We developed and validated protocols for rapid, inexpensive analysis of H₂S using GDTs and aeration-oxidation (A-O) glassware commonly available in wineries. Video demonstration of the approaches is provided ([Supplemental Video 1](#)).

Key Findings:

- Two approaches were validated for GDT-based quantitation of H₂S in wine. In the first approach, H₂S was sparged from the sample with N₂ gas, analogous to Monier-Williams analyses of SO₂. In the second approach, H₂S was sparged by a vacuum-generated air stream, analogous to A-O analyses of SO₂.
- Both approaches require <15 min/sample and achieve excellent linearity. The calibration curve for the N₂ Method was identical to the curve predicted from the manufacturer’s markings. The Aspiration Method was less sensitive, likely because of oxidative losses, but this method was simpler to set up, operate, and adapt to samples with higher concentrations.
- The limits of detection were 12 to 13 ng H₂S for the methods, or ~0.2 µg/L using a 60-mL sample. The mean coefficients of variance were <5% for both approaches.
- Using these methods, we observed that commercial wines stored in aluminum cans have significantly higher H₂S content than commercial wines in glass packaging.

Impact and Significance: Wineries can use these novel methods for routine H₂S analysis without significant equipment investment. In addition to cost savings, the ability to test H₂S onsite, rather than sending samples to an external lab, decreases risk of H₂S losses through oxidation or volatilization. These new analytical tools can be used for benchmarking, diagnosing faulty wines, or evaluating the effects of winemaking parameters, such as yeast selection, remediation treatments, and packaging options, on H₂S.

Key words: gas detection tubes, reduced aromas, sulfide analysis, wine fault

Overview

Sulfur-like off-aromas (SLOs) are one of the most common faults observed in commercial wines.¹ Although several sulfhydryls can contribute to SLOs, hydrogen sulfide (H₂S) is the S-compound most frequently reported to be in excess of its sensory threshold (~1 µg/L)¹ in wines with SLOs. H₂S may contribute directly to SLOs due to its rotten egg aroma, or its presence could serve as a marker for related malodorous sulfhydryls. H₂S can be produced during fermentation through several pathways, including as an intermediary step in the biosynthesis

of S-amino acids,² as a degradation product of elemental sulfur (S^0) fungicide residues,^{3,4} and as a product of the catabolism of S-amino acids (especially cysteine).⁵ H_2S formed during fermentation will be partially lost due to CO_2 entrainment⁶ and can be further diminished postfermentation by winemaking approaches such as copper addition or aeration.⁷ However, these approaches can generate precursor compounds (copper sulfide complexes and organopolysulfanes) capable of releasing H_2S during the reductive storage conditions typical for bottled wine (i.e., low oxygen in the presence of SO_2).^{8,9,10} Finally, H_2S is anecdotally reported to form through storage of wine in aluminum cans, possibly from the reaction of SO_2 with the aluminum metal, as well as from the previously described precursors. Thus, enologists may wish to quantify H_2S not only to determine its potential contribution to faulty wines but also to evaluate winemaking parameters such as yeast selection, fermentation conditions, remediation treatments, and packaging options.

Levels of H_2S in wines are in the range of 1 to 20 $\mu g/L$ at the end of fermentation,¹¹ and its low concentration and high reactivity require the use of specialized analytical approaches. Early reports on H_2S quantification in wines generally relied on laborious wet-chemical approaches, such as capturing sparged H_2S with a $Cd(OH)_2$ solution followed by redox titration with methylene blue.¹² More recent reports have used gas chromatography (GC) coupled with a range of detectors, including pulsed-flame photometric detection¹³ (PFPD) and sulfur chemiluminescence detection.¹ These methods offer excellent detection limits ($<1 \mu g/L$) and high selectivity but are inappropriate for use in most commercial wineries due to the expense of the equipment and the specialized skill necessary for their operation. Furthermore, H_2S is

highly volatile and readily oxidized, requiring considerable precautions during sample handling.

A modern version of classic colorimetric approaches uses gas detection tubes (GDTs) for selective H_2S quantification. Originally developed for the mining industry, GDTs for H_2S consist of glass tubes filled with an inert packing coated with an appropriate indicator compound (e.g., lead acetate). As H_2S flows through the tube, it reacts irreversibly and causes a discoloration such that the length of the stain is proportional to the mass of H_2S passing through the tube. An example of discoloration in different GDTs is provided in Supplemental Figure 1.

The first reported use of GDTs to measure H_2S in enological studies was the measurement of total H_2S produced by yeast strains during small-scale fermentations.^{14,15} In those studies, the CO_2 produced during fermentation was used to force H_2S through the GDTs, an approach that is not viable for postfermentation wines without CO_2 . For postfermentation H_2S analysis, our

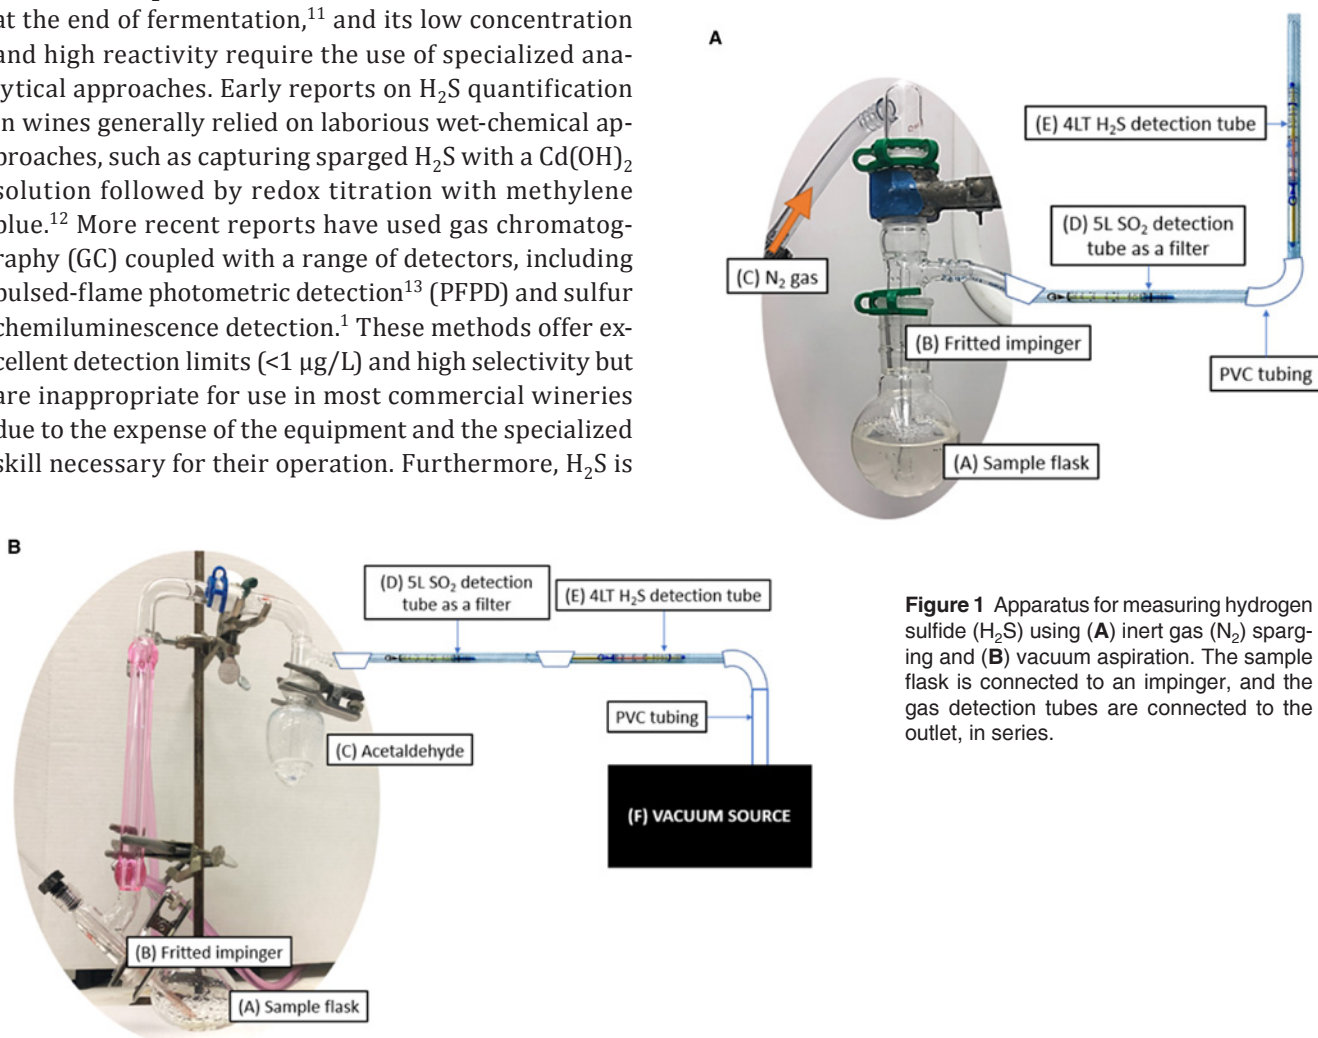


Figure 1 Apparatus for measuring hydrogen sulfide (H_2S) using (A) inert gas (N_2) sparging and (B) vacuum aspiration. The sample flask is connected to an impinger, and the gas detection tubes are connected to the outlet, in series.

group previously reported that CO₂ could be generated in situ by adding carbonate-containing antacid tablets to a flask containing a wine sample and fitted with a GDT. However, this approach results in a shift of the pH to ~6, which could potentially release H₂S from known precursors.¹⁶ In addition, the rapid generation of CO₂ gas can occasionally result in dislodging the detection tube or another connection.

In this work, we describe a rapid, inexpensive method for detecting and quantifying H₂S in still wine samples using a GDT and the widely available aeration-oxidation apparatus. We report figures of merit, apply the assay to commercial wines, and provide a detailed video description of the protocol ([Supplemental Video 1](#)).

Major Observations and Interpretations

Apparatus and materials. The principle for the proposed H₂S detection method is based on GDT protocols previously developed for measurement of S⁰ residues in grape must³ or H₂S formed following release from wine precursors or during the course of fermentation.^{14,15,16,17} The current approach uses either inert nitrogen gas (N₂ Method) or vacuum aspiration (Aspiration Method) to sparge H₂S from the sample and through the GDT tube (Figure 1A and 1B), resulting in a discoloration of the tube ([Supplemental Figure 1](#)). The flask and tubes are connected in series through PVC tubing. A sufficient length of PVC tubing (15 cm or more) between the sam-

ple flask and the first GDT is recommended to prevent splashing of water droplets and fouling of the GDT inlet. A demonstration of these approaches can be found in the accompanying video ([Supplemental Video 1](#)). In contrast to earlier studies that relied on antacid tablets to evolve CO₂ gas in situ, these new approaches did not cause pH changes or dilution of the sample that could have risked release of H₂S from precursors such as copper-sulfhydryl complexes.¹⁶ The antacid-based approaches also required opening and resealing the apparatus to sequentially add tablets, which risked loss of H₂S due to volatilization.

As described in detail below, the N₂ and Aspiration Methods both yield satisfactory results. However, the Aspiration Method is easier to use in practice, as the N₂ Method can overpressure and dislodge the GDT or other components, resulting in leaks. The Aspiration Method also allows easy replacement of the GDT if the tube becomes saturated during a run. Unlike the Aspiration Method, the N₂ Method produced a calibration curve identical to the curve calculated from the manufacturer's GDT markings and thus may require less frequent calibration (Figure 2).

GDT selection and interference from SO₂ and other sources. The Gastec 4LL and 4LT GDTs are not susceptible to interference from most wine components, including sulfate, acetic acid, or water vapor.³ Several other compounds listed by the specification sheets for these GDTs (such as ozone, nitrogen dioxide, nitric acid, hydrogen chloride, hydrogen fluoride, and ammonia)¹⁸

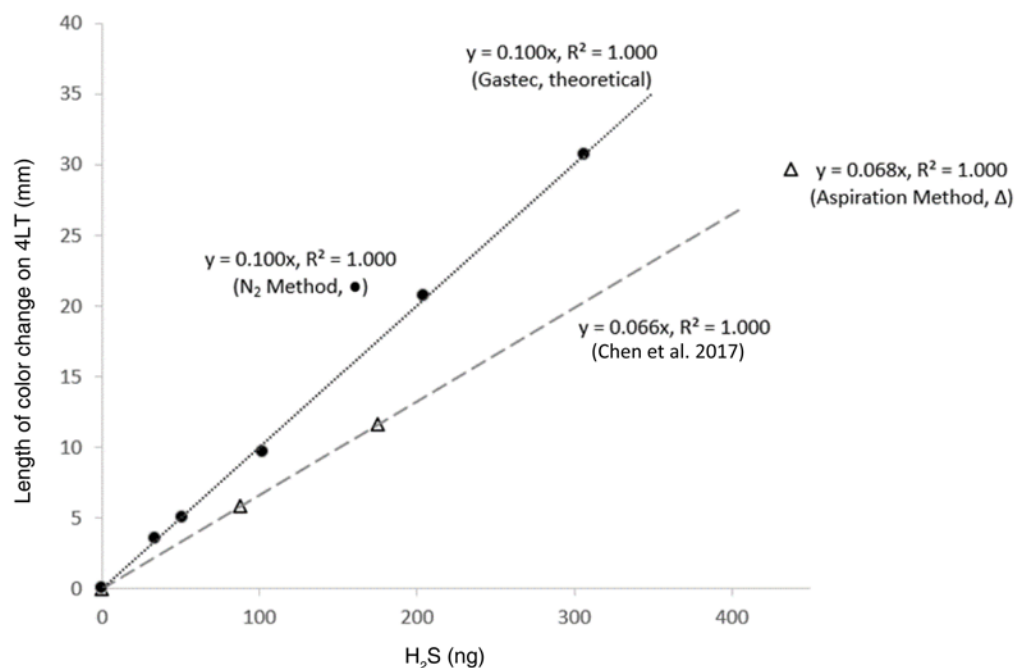


Figure 2 Calibration curves for hydrogen sulfide (H₂S) (mass of H₂S [y, ng] versus stain length [x, mm]) on Gastec 4LT gas detection tubes: Aspiration Method from the current study, regression equation is $y = 14.7x$; N₂ Method from the current study, $y = 10.0x$; Alka-Seltzer tablet sparging, with regression equation calculated from reported values,¹⁷ $y = 14.9x$. The manufacturer's theoretical regression equation (H₂S versus stain length; $y = 10.0x$) is calculated from tube markings. For all regressions, the intercept was not significantly different from zero and was omitted.

are unlikely to be important to wine analyses. However, there are two potentially relevant interferences: thiols (mercaptans) and SO₂. Thiols are reported to be a source of interference for the more sensitive 4LT tubes (which contain mercuric chloride [HgCl₂]) but not for the 4LL tubes (which contain Pb(CH₃COO)₂). Although the 4LT tubes respond more strongly to thiols than to H₂S,¹⁴ thiols are also less volatile and are typically found at lower concentrations in wine.¹ We previously estimated that interference from methanethiol (the thiol of greatest concern due to its volatility and concentration) in a typical wine would be only 25% of the H₂S signal.¹⁷ However, in situations where interference from methanethiol or other thiols is of concern, 4LL tubes can be substituted at the expense of decreasing the sensitivity approximately three-fold.³

SO₂ is described as a source of interference for both 4LL and 4LT tubes.¹⁸ Earlier reports by our group using GDTs relied on antacid tablets to generate a gas stream, which buffered the pH to ~6 and strongly favored non-volatile forms of SO₂ (i.e., bisulfite and sulfite). However, in initial studies at native pH, we observed considerable interference from model solutions containing SO₂ (data not shown). To remove SO₂ from the gas stream, we investigated three approaches: adding hydrogen peroxide (H₂O₂) or acetaldehyde directly to the sample, using an inline SO₂ GDT to scrub the gas stream, and using an inline acetaldehyde solution.

Direct addition of acetaldehyde was not effective at eliminating the interference (data not shown). Addition of H₂O₂ (0.18% and 0.35% v/v) to the wine sample was effective at removing the SO₂ interference but was not pursued further due to concern about H₂S oxidation.

SO₂ GDTs were effective in eliminating interference from SO₂. The Gastec 5Lb and 5L SO₂ tubes were both tested, and the 5L was ultimately selected for its higher capacity. We also evaluated the use of an inline solution of acetaldehyde (1.5% v/v; Figure 1B, Item C). Alone, the inline acetaldehyde solution was unable to fully remove SO₂ interference, but inclusion of an acetaldehyde trap before the SO₂ GDT had the advantage of preserving the lifetime of the SO₂ GDT. If this approach is used, the acetaldehyde solution should be replenished when the SO₂ GDT is replaced.

GDTs respond to the initial mass of H₂S, not the initial concentration, and we were able to vary the sample volume of model wine or Milli-Q water over a wide range (6 to 66 mL) without affecting the relative response (Supplemental Figure 2). We also observed that the stain length stopped increasing after 5 min for volumes ≤10 mL. However, volumes ≥60 mL required at least 10 min

analysis time before tube staining (and, thus, H₂S sparging) was complete. We selected a 10-min analysis time for further experiments, but shorter analysis times of 5 min may be appropriate for sample volumes of 10 mL or less.

Calibration and figures of merit for H₂S GDTs. Figures of merit for the N₂ and Aspiration Methods are summarized in Table 1. We observed a linear relationship ($r^2 > 0.99$) between the length of color change on the H₂S GDT and the nominal concentration of the calibration standards for both methods (Figure 2).

$$(i) \text{ N}_2 \text{ Method Length of color change (mm)} = 0.100 \times \text{H}_2\text{S (in ng)}$$

$$(ii) \text{ Aspiration Method Length of color change (mm)} = 0.068 \times \text{H}_2\text{S (in ng)}$$

Theoretical calibration curves based on the manufacturer-provided markings (Supplemental Figure 2) were also plotted, along with a curve from a previous report which used antacid tablets as an in situ gas source (Figure 2).¹⁷ The slope of the theoretical curve based on manufacturer markings (dotted line) was identical to the slope observed for the N₂ Method. However, the slope of the Aspiration Method was ~30% lower than the theoretical slope, with a similar value reported for the earlier antacid-tablet method (dashed line).

The close agreement between the N₂ Method slope and the theoretical slope based on manufacturer markings is a potential advantage for this method over the Aspiration Method, as the N₂ method could potentially be used with less extensive calibration. The lower sensitivity of the Aspiration Method could be due to partial losses of H₂S from oxidation during the analyses, as the sample was not protected from air in this analysis. The reason for the lower-than-theoretical sensitivity of the antacid method is less clear, as the evolved CO₂ gas should have created an anoxic environment. However,

Table 1 Figures of merit for hydrogen sulfide (H₂S) gas detection tube (GDT) N₂ and Aspiration Methods. LOD, limit of detection.

	Mean %CV ^a	Linear range (ng H ₂ S)	r ²	LOD ^b (ng H ₂ S)	LOD ^b (µg/L H ₂ S for 60-mL sample)
N₂ Method	4.5	0307	0.9991	13	0.2
Aspiration Method	4.1	0875	0.9993	12	0.2

^aMean and range for percent coefficient of variation (%CV), where %CV for each wine was calculated as standard deviation/mean.

^bLOD was calculated as 3.3 × standard deviation of the lowest concentration standard divided by the slope.

the antacid method required opening and closing the reaction flask to add additional tablets, which could have introduced air.

Coefficients of variance (%CV) were calculated for each of the five calibration standards for each method ($n = 3$ replicates for each standard), and the repeatability calculated as the mean %CV. We observed excellent repeatability (%CV <5%; Table 1). We also observed excellent within-lab reproducibility (Figure 3). Two standard solutions ($n = 16$ total) were run at regular intervals over a four-week period without recalibrating the tubes. Data were normalized to the expected value. We observed a 95% confidence interval of 92 to 97% recovery (ideal = 100%) of the expected signal over the four-week experiment.

Based on noise calculations for the lowest calibration standard on the 4LT GDTs, we calculated limits of detection of 13 ng H₂S for the N₂ Method and 12 ng H₂S for the Aspiration Method. As previously reported for GDT methods, the limit of detection (LOD) is primarily determined by the smallest observable change (0.5 to 1.0 mm) in stain length.³ This can be more challenging for the 4LT tubes than for other tubes due to the subtle color change (yellow to pink). Using a 60-mL sample volume, we could achieve a detection limit of 0.2 µg/L. This value is below the reported odor threshold for H₂S in wine¹ and compares favorably to detection limits reported with more expensive technologies. For example, a detection

limit of 0.2 µg/L was reported for H₂S using GC and a sulfur chemiluminescence detector,¹ whereas quantitation limits of 1.0 and 1.7 µg/L were reported using GC-PFPD.^{13,14,15,16,17,18,19}

As mentioned above, 4LT tubes achieve the best sensitivity and detection limits but suffer from interference from thiols,¹⁴ and the use of the less-sensitive Gastec 4LL tube may be prudent when thiol interference is suspected. Furthermore, the cost of a box of 10 GDTs is ~\$70 USD, and tubes cannot be regenerated. Although multiple samples can be analyzed on one GDT until the tube is exhausted, high H₂S concentration samples can quickly exhaust the capacity of a Gastec 4LT (~500 ng of H₂S). In practice, we typically used a GDT only once before disposal, particularly when handling samples of unknown H₂S concentration, because we did not want to risk saturating the GDT. However, we did reuse tubes that were not yet saturated when the expected concentration was known (such as with calibration standards). In general, we recommend using the 4LT tube and 60-mL sample size for low-concentration samples (less than ~5 µg/L), and using the 4LL tube when measuring higher-concentration samples or when high levels of thiol interference are expected.

Analysis of commercial wines. A convenient sample of 12 commercial wines (six bottled, six canned) were purchased from local stores and evaluated using the GDT methods (Figure 4). We observed an average H₂S con-

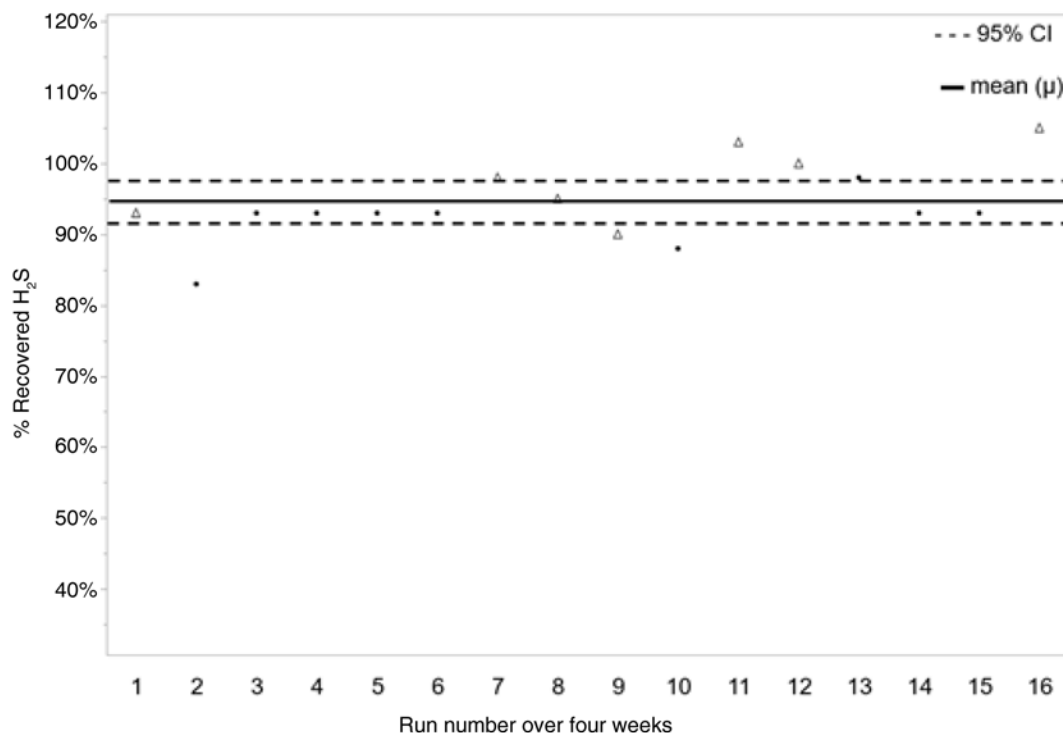


Figure 3 In-lab reproducibility of N₂ Method measured over four weeks with higher concentration standards (Δ) = 3.10 µg/L ($n = 7$) and lower concentration standards (\bullet) = 1.55 µg/L ng ($n = 9$). Sample measurements are normalized to the expected value (% Recovery hydrogen sulfide [H₂S] = H₂S measured/H₂S added). The 95% confidence interval (CI) is shown as $\mu = 94.4 \pm 2.9\%$.

centration in the bottled wines of $1.1 \pm 0.9 \mu\text{g/L}$, a range consistent with values reported elsewhere.¹ The mean H_2S in the canned wines was $13.5 \pm 9.9 \mu\text{g/L}$ — significantly higher than that in the bottled wines ($p < 0.05$). The highest concentration of H_2S in the canned wines was nearly $30 \mu\text{g/L}$, comparable to the highest values observed in a survey of commercial wines described as “reduced”.¹ These observations concur with recent anecdotal observations that wines stored in aluminum cans will develop H_2S during storage due to anoxic conditions and degradation of H_2S precursors, as well as reaction of SO_2 with the aluminum metal to form H_2S .²⁰ As a caveat, the effects of packaging may have been confounded with other variables, such as production practices used for wines destined for cans; the higher levels of H_2S in canned wine are not necessarily due to interactions between the can and the wine.

Broader Impact

We have described and validated two convenient, inexpensive approaches to measuring free H_2S in commercial wine samples using selective GDTs and glassware from an A-O unit. With 60-mL sample volumes, limits of detection were achieved that are below the sensory threshold in wine. The calibration produced using the

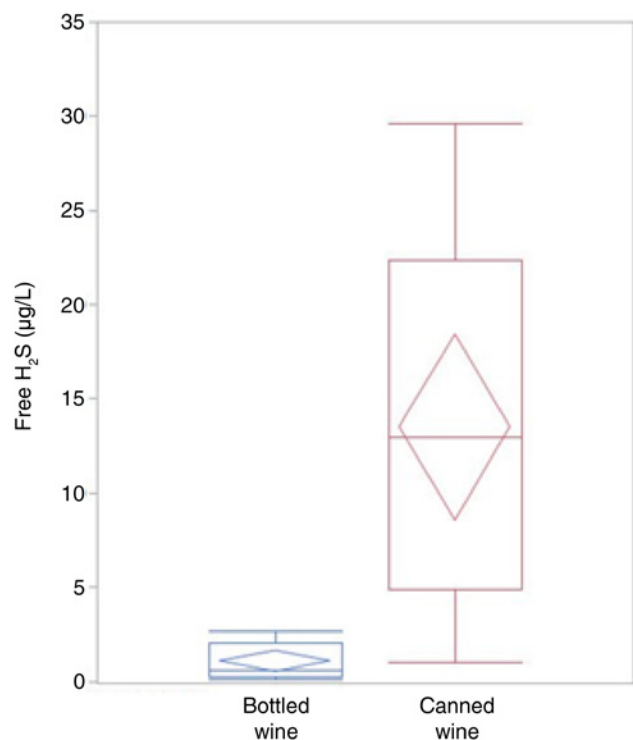


Figure 4 Quantitation of free hydrogen sulfide (H_2S) in a selection of commercial bottled ($n = 6$) and canned wines ($n = 6$).

N_2 Method is identical to the calibration calculated from the manufacturer’s markings on the 4LT GDT, suggesting that the method could be used without the need for regular calibration. In contrast, the Aspiration Method was easier to perform, making it more practical in winery settings, but should be regularly calibrated with standard solutions. By allowing on-site measurement with minimal resources, both methods avoid the risks of H_2S loss associated with sending samples to off-site labs. In addition to diagnosing faulty wines, these analytical tools can be used for benchmarking and evaluating the effects of winemaking choices (e.g., packaging and fining trials). Finally, although not the subject of the current investigation, the method could also likely be adapted for analysis of H_2S precursor forms by appropriate pretreatment of the wine (e.g., addition of brine to release H_2S from copper-sulfhydryl complexes).¹⁶

Experimental Design

Chemical reagents. Ethanol (140 and 190 proof) was purchased from Koptec. L(+)-tartaric acid (99%) and H_2O_2 (35% w/w) were purchased from Acros Organics. Sodium hydroxide solution (NaOH, 50% w/w) was purchased from Fisher Chemical. Sodium sulfide nonahydrate ($\text{Na}_2\text{S} \cdot 9\text{H}_2\text{O}$, 98%) was purchased from Beantown Chemical. Silicone oil was purchased from Sigma-Aldrich. Acetaldehyde (99%) was purchased from Alfa Aesar. Deionized, distilled water with a resistance of $18.2 \text{ M}\Omega \times \text{cm}$ at 25°C was provided by a Milli-Q system (Millipore Sigma) and used for all experiments. Nitrogen gas (N_2 , UHP) cylinders were supplied by Airgas USA LLC. Samples were held in a temperature-controlled incubator at 10°C until use.

GDTs. Commercially available GDTs (Gastec International) for the analyses of H_2S (Gastec 4LT) and SO_2 (Gastec 5L) were purchased from Airgas and W.W. Grainger, respectively. The H_2S 4LT tubes rely on the reaction of H_2S with HgCl_2 , resulting in a color change from yellow to pink. The SO_2 5L tubes rely on the reaction of SO_2 with BaCl_2 to generate HCl, resulting in the appearance of a yellow color. In the method presented here, SO_2 GDTs are used only for filtering the gas stream of any volatilized SO_2 to prevent interference in the H_2S tube; the Gastec 5L GDTs are not appropriate for quantification of SO_2 in this method. GDTs should be stored at a cool temperature, refrigerated at or below 10°C , or as indicated on the package. After opening, a GDT may be used reliably for several sequential analyses within one day (data not shown) but should be replaced with a new tube each day.

Quantitation of free H_2S in wines using GDT with N_2 sparging (N_2 Method). The N_2 Method is depicted

in Figure 1A. For each analysis, a volume of wine sample (up to 60 mL) was added to a 100-mL round-bottom flask (A). For red wines, four to five drops of silicone oil were added to decrease foaming. One neck of the flask was fitted with a fritted impinger (B) from an A-O unit (Adams & Chittenden Scientific Glass Coop); the impinger was connected to an N₂ cylinder on the inlet side (C). The outlet side was connected by PVC tubing to an SO₂ scrubber (see next subsection), such as an SO₂ GDT (D) followed by an H₂S GDT (E). The sample was sparged with N₂ for 10 min at ambient temperature (~20°C), and the length of color change on the 4LT tube was measured. The flow rate was ~100 mL/min, as faster flow rates would occasionally dislodge the GDT. Under these conditions, negligible change in the length of the GDT stain was observed after 10 min.

Quantitation of free H₂S in wines using GDT with vacuum aspiration (Aspiration Method). In the Aspiration Method (Figure 1B), wine samples were added to a 100-mL pear-shaped flask (A) and attached to a fritted impinger (B) left open to atmosphere. The outlet side was connected by PVC tubing to an SO₂ scrubber (see next subsection), such as a flask containing a 1.5% by volume acetaldehyde solution (C) and an SO₂ GDT (D) followed by an H₂S GDT (E). The outlet of the H₂S GDT was attached by PVC tubing to a vacuum source (F). The sample was vacuum aspirated for 10 min, and analyses were carried out at room temperature (~20°C), with the length of color change on the 4LT tube measured. Unlike the N₂ method, we encountered no issues with dislodging the tubes, as the highest gas flow rate we could achieve was <100 mL/min.

Removal of SO₂ interferences in N₂ and Aspiration Methods. Three strategies were evaluated for preventing SO₂ interference in the Gastec 4LL and 4LT tubes: inserting an SO₂ GDT in series before the H₂S GDT, as shown in Figure 1A Item D or Figure 1B Item D; pretreating the sample with H₂O₂ or acetaldehyde; or inserting a 100-mL pear-shaped flask containing 10 mL of 1.5% (v/v) acetaldehyde solution between the sample flask and the GDT, as shown in Figure 1B Item C. In our evaluations, the first and third strategies were carried out as described in the methods above. For the second strategy, samples were pretreated by adding an aliquot of the oxidizing agent directly to 60 mL of a commercial white wine previously observed to cause interference in the 4LT GDT. H₂O₂ solution was prepared at 3.5% (v/v) and added in quantities of 1, 3, and 6 mL, corresponding to 0.06 to 0.35% (v/v). Acetaldehyde was added in quantities of 5 μL, 25 μL, 50 μL, and 100 μL, corresponding to 0.01 to 0.17% (v/v).

Effects of sample volume and analysis time. To evaluate the effects of sample volume on response, we varied the sample volume from 6 to 66 mL while analyzing the H₂S calibration standards (described below) by the N₂ Method. A response factor (length of stain in mm/ng H₂S) was then calculated for each condition. Analysis time was initially determined by recording the time when the color change ceased on the H₂S GDT for 6 and 10 mL samples of model wine or Milli-Q water spiked with H₂S. Aliquots of H₂S standard solutions were added to the selected sample volume, and analysis of free H₂S was carried out as previously described. For sample volumes ≥60 mL, the analysis time was increased to 10 min to reach the point when no additional color change was observed. Following optimization, analysis times of 10 min were used for all runs.

Method calibration. A working solution of Na₂S · 9H₂O (50 μM) was freshly diluted from a standardized stock solution (5 mM) every 48 hrs, and the stock solution was newly prepared every 2 wks. Stock solutions were stored in the refrigerator when not in use. Calibration standards of 0.017, 0.025, 0.050, 0.100, and 0.150 μM H₂S were prepared in model wine (12% alcohol v/v, 5 g/L tartaric acid, pH adjusted to 3.5 by dropwise addition of NaOH). Calibration curves were prepared by plotting “length of stain (mm)” versus “mass H₂S (ng)”.

The observed slopes from each approach were compared with the slopes indicated by the manufacturer’s markings on the GDT tubes. Because the GDT markings are reported in units of ppm (v/v), the values were converted to units of “ng H₂S” using the Ideal Gas Law and the manufacturer’s suggested 100 mL gas volume for air sampling.¹⁸ Details of the conversion calculation are provided in the Supplemental Calculation.

Reproducibility. In-lab reproducibility was assessed for the N₂ Method. An addition of Na₂S · 9H₂O working solution (50 μM) was measured in Milli-Q water at two concentrations, 1.55 μg/L (n = 9) and 3.10 μg/L (n = 7), over the course of four weeks.

Figures of merit. Calibration curves were used to determine the linear range. The LOD was calculated as 3.3 × standard deviation for the lowest concentration standard (0.6 μg/L, or 34 ng using a 60-mL sample volume) within the linear range (0 to 5.1 μg/L, or 0 to 307 ng using a 60-mL sample volume). Standard deviations were determined for each set of calibration standards, and the coefficient of variance was calculated as the mean of these values.

Evaluation of commercial wines. A convenient sample of commercial bottled (n = 6, two red, four white) and canned (n = 6, two white, two rosé, two rosé sparkling)

wines was purchased from local retailers (Ithaca, NY) and represented a range of regions and cultivars. Vintages ranged from one to three years old, although a few products were labeled as “non-vintage”. Bottled samples were analyzed for H₂S in duplicate, and canned samples were analyzed in triplicate.

Statistical Analysis. JMP Pro 14 (SAS Institute, Inc.) was used for statistical analysis.

References and Endnotes

1. Siebert TE, Solomon MR, Pollnitz AP, and Jeffery DW. 2010. Selective determination of volatile sulfur compounds in wine by gas chromatography with sulfur chemiluminescence detection. *J Agric Food Chem* 58:9454-9462.
2. Giudici P and Kunkee RE. 1994. The effect of nitrogen deficiency and sulfur-containing amino acids on the reduction of sulfate to hydrogen sulfide by wine yeasts. *Am J Enol Vitic* 45:107-112.
3. Kwasniewski MT, Allison RB, Wilcox WF and Sacks GL. 2011. Convenient, inexpensive quantification of elemental sulfur by simultaneous in situ reduction and colorimetric detection. *Anal Chim Acta* 703:52-57.
4. Jastrzembski JA, Allison RB, Friedberg E and Sacks GL. 2017. Role of elemental sulfur in forming latent precursors of H₂S in wine. *J Agric Food Chem* 65:10542-10549.
5. Pripis-Nicolau L, de Revel G, Bertrand A and Maujean A. 2000. Formation of flavor components by the reaction of amino acid and carbonyl compounds in mild conditions. *J Agric Food Chem* 48:3761-3766.
6. Park SK, Boulton RB and Noble AC. 2000. Formation of hydrogen sulfide and glutathione during fermentation of white grape musts. *Am J Enol Vitic* 51:91-97.
7. Bekker MZ, Kreitman GY, Jeffery DW and Danilewicz JC. 2018. Liberation of hydrogen sulfide from dicysteinyl polysulfanes in model wine. *J Agric Food Chem* 66:13483-13491.
8. Kreitman GY, Danilewicz JC, Jeffery DW and Elias RJ. 2017. Copper(II)-mediated hydrogen sulfide and thiol oxidation to disulfides and organic polysulfanes and their reductive cleavage in wine: Mechanistic elucidation and potential applications. *J Agric Food Chem* 65:2564-2571.
9. Franco-Luesma E and Ferreira V. 2014. Quantitative analysis of free and bonded forms of volatile sulfur compounds in wine. Basic methodologies and evidences showing the existence of reversible cation-complexed forms. *J Chromatogr A* 1359:8-15.
10. Ugliano M, Kwiatkowski M, Vidal S, Capone D, Siebert T, Dieval J-B, Aagaard O and Waters EJ. 2011. Evolution of 3-mercaptohexanol, hydrogen sulfide, and methyl mercaptan during bottle storage of Sauvignon blanc wines. Effect of glutathione, copper, oxygen exposure, and closure-derived oxygen. *J Agric Food Chem* 59:2564-2572.
11. Ugliano M, Kolouchova R and Henschke PA. 2011 Occurrence of hydrogen sulfide in wine and in fermentation: Influence of yeast strain and supplementation of yeast available nitrogen. *J Ind Microbiol Biotechnol* 38:423-429.
12. Acree TE, Sonoff EP and Splittstoesser DF. 1972, Effect of yeast strain and type of sulfur compound on hydrogen sulfide production. *Am J Enol Vitic* 23:6-9.
13. Lopez R, Lapeña AC, Cacho J and Ferreira V. 2007. Quantitative determination of wine highly volatile sulfur compounds by using automated headspace solid-phase microextraction and gas chromatography-pulsed flame photometric detection. Critical study and optimization of a new procedure. *J Chromatogr A* 1143:8-15.
14. Ugliano M and Henschke PA. 2010. Comparison of three methods for accurate quantification of hydrogen sulfide during fermentation. *Anal Chim Acta* 660:87-91.
15. Park SK. 2008. Development of a method to measure hydrogen sulfide in wine fermentation. *J Microbiol Biotechnol* 18:1550-1554.
16. Kreitman GY, Elias RJ, Jeffery DW and Sacks GL. 2019. Loss and formation of malodorous volatile sulfhydryl compounds during wine storage. *Crit Rev Food Sci Nutr* 59:1728-1752.
17. Chen Y, Jastrzembski JA and Sacks GL. 2017. Copper-complexed hydrogen sulfide in wine: Measurement by gas detection tubes and comparison of release approaches. *Am J Enol Vitic* 68:91-99.
18. Gastec. Instructions for Hydrogen Sulphide Detector Tube. *In* Gastec No. 4LT. Gastec Corporation: Kanagawa, Japan.
19. Fang Y and Qian MC. 2005. Sensitive quantification of sulfur compounds in wine by headspace solid-phase microextraction technique. *J Chromatogr A* 1080:177-185.
20. Allison RB, Sacks GL, Maslov-Bandić L, Montgomery A and Goddard J. 2020. Research Focus: The Chemistry of Canned Wines. *Appellation Cornell* 40:1-8